

434
3

610204
222

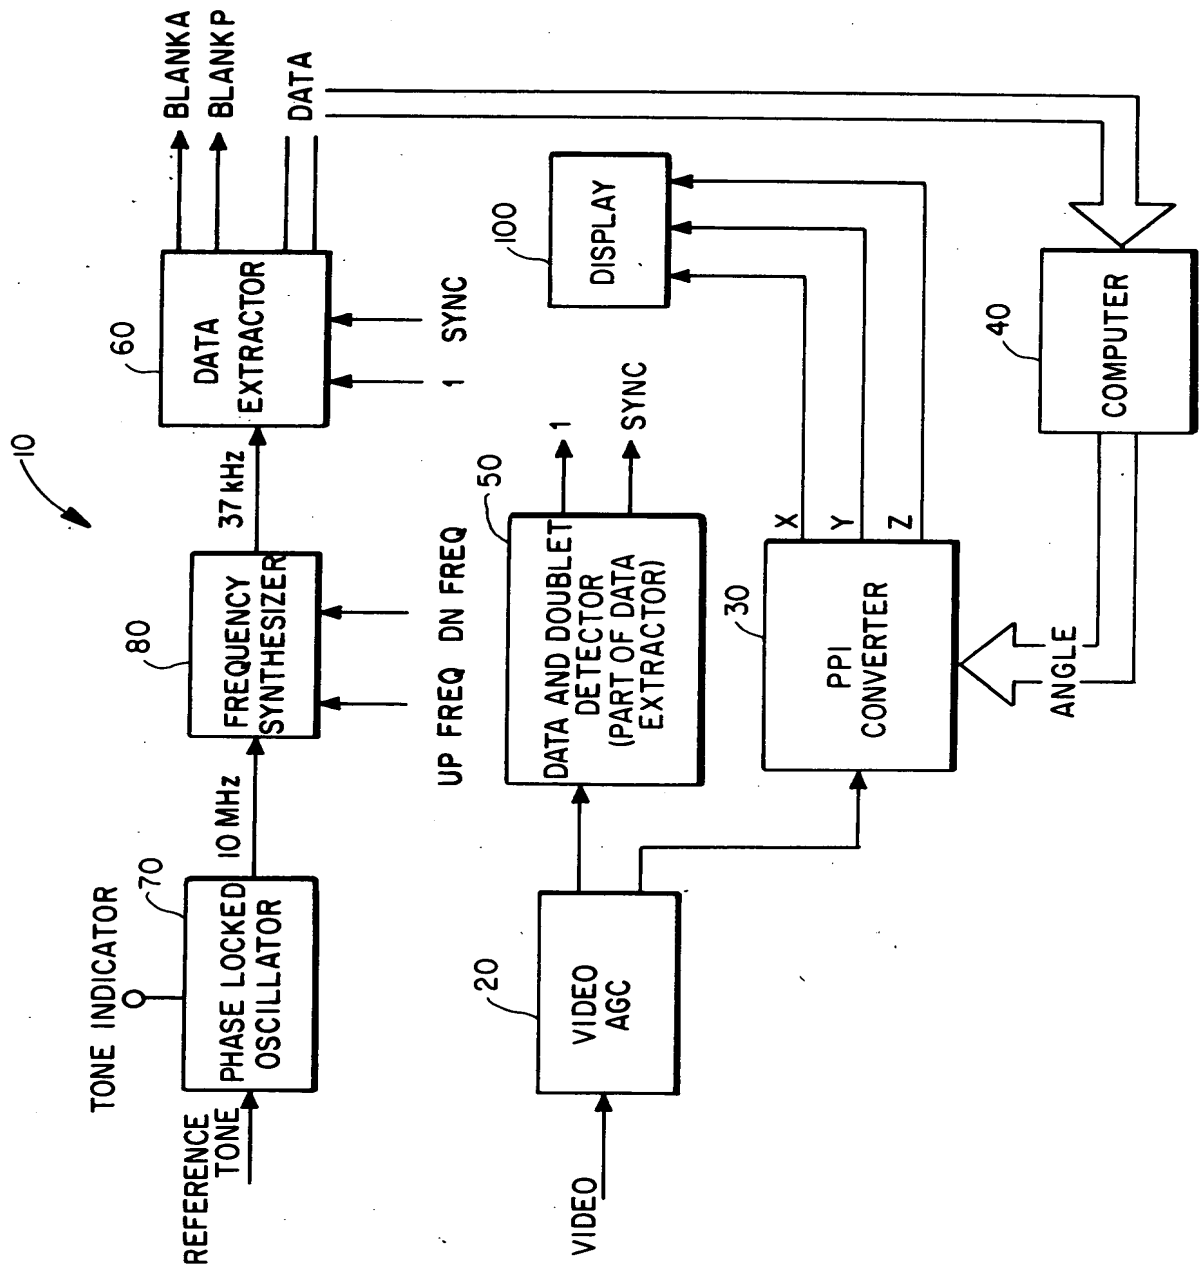


FIG. 1

610204


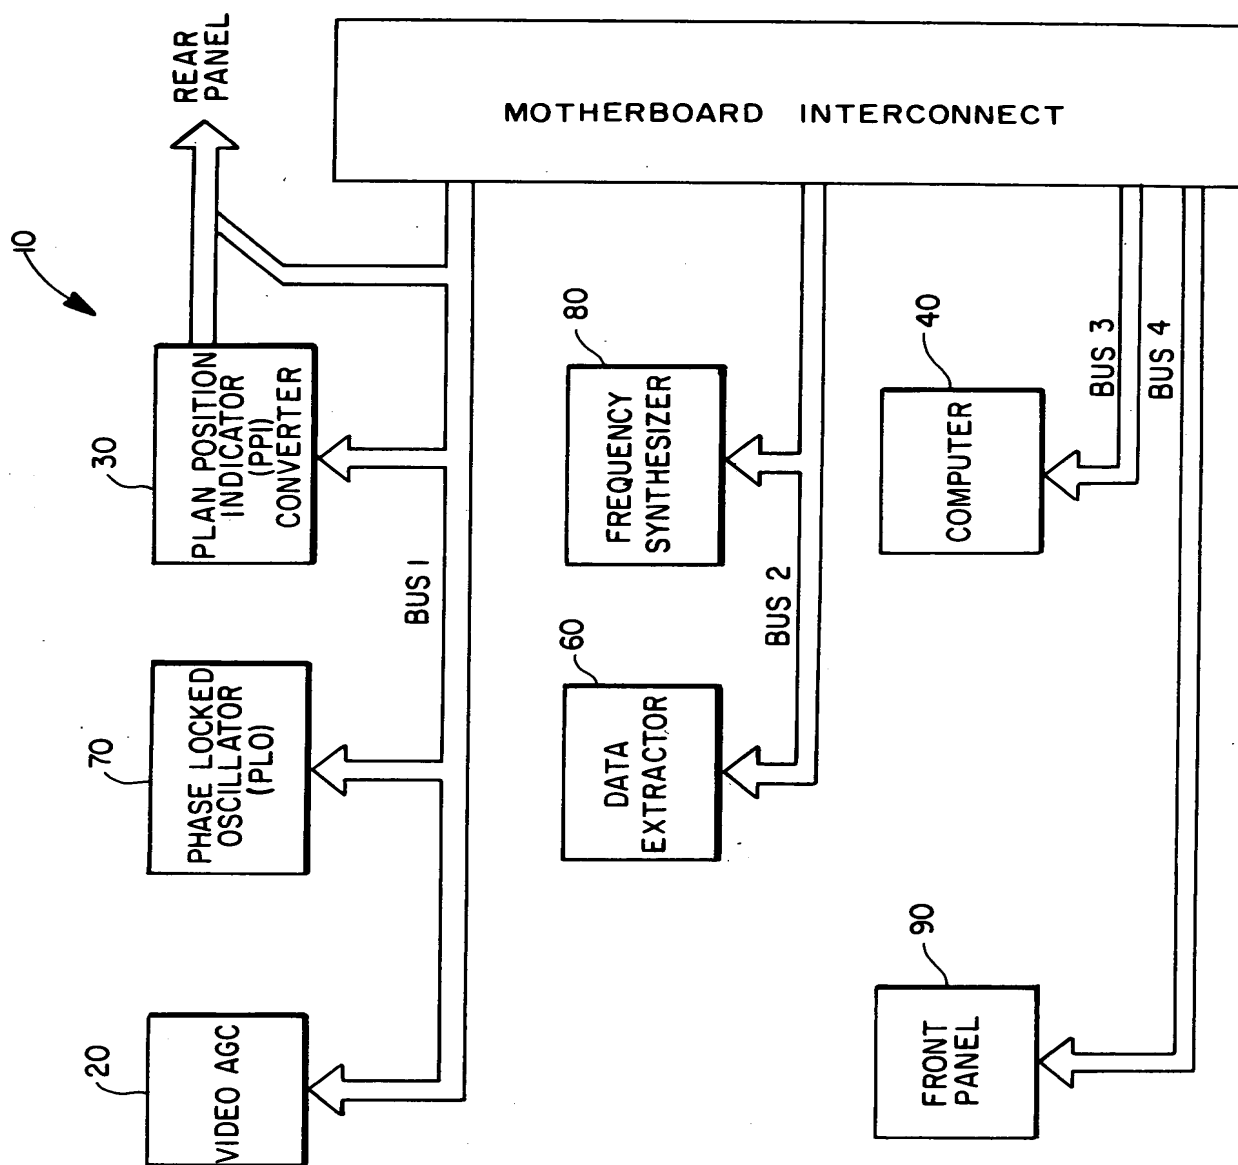


FIG. 2

610204

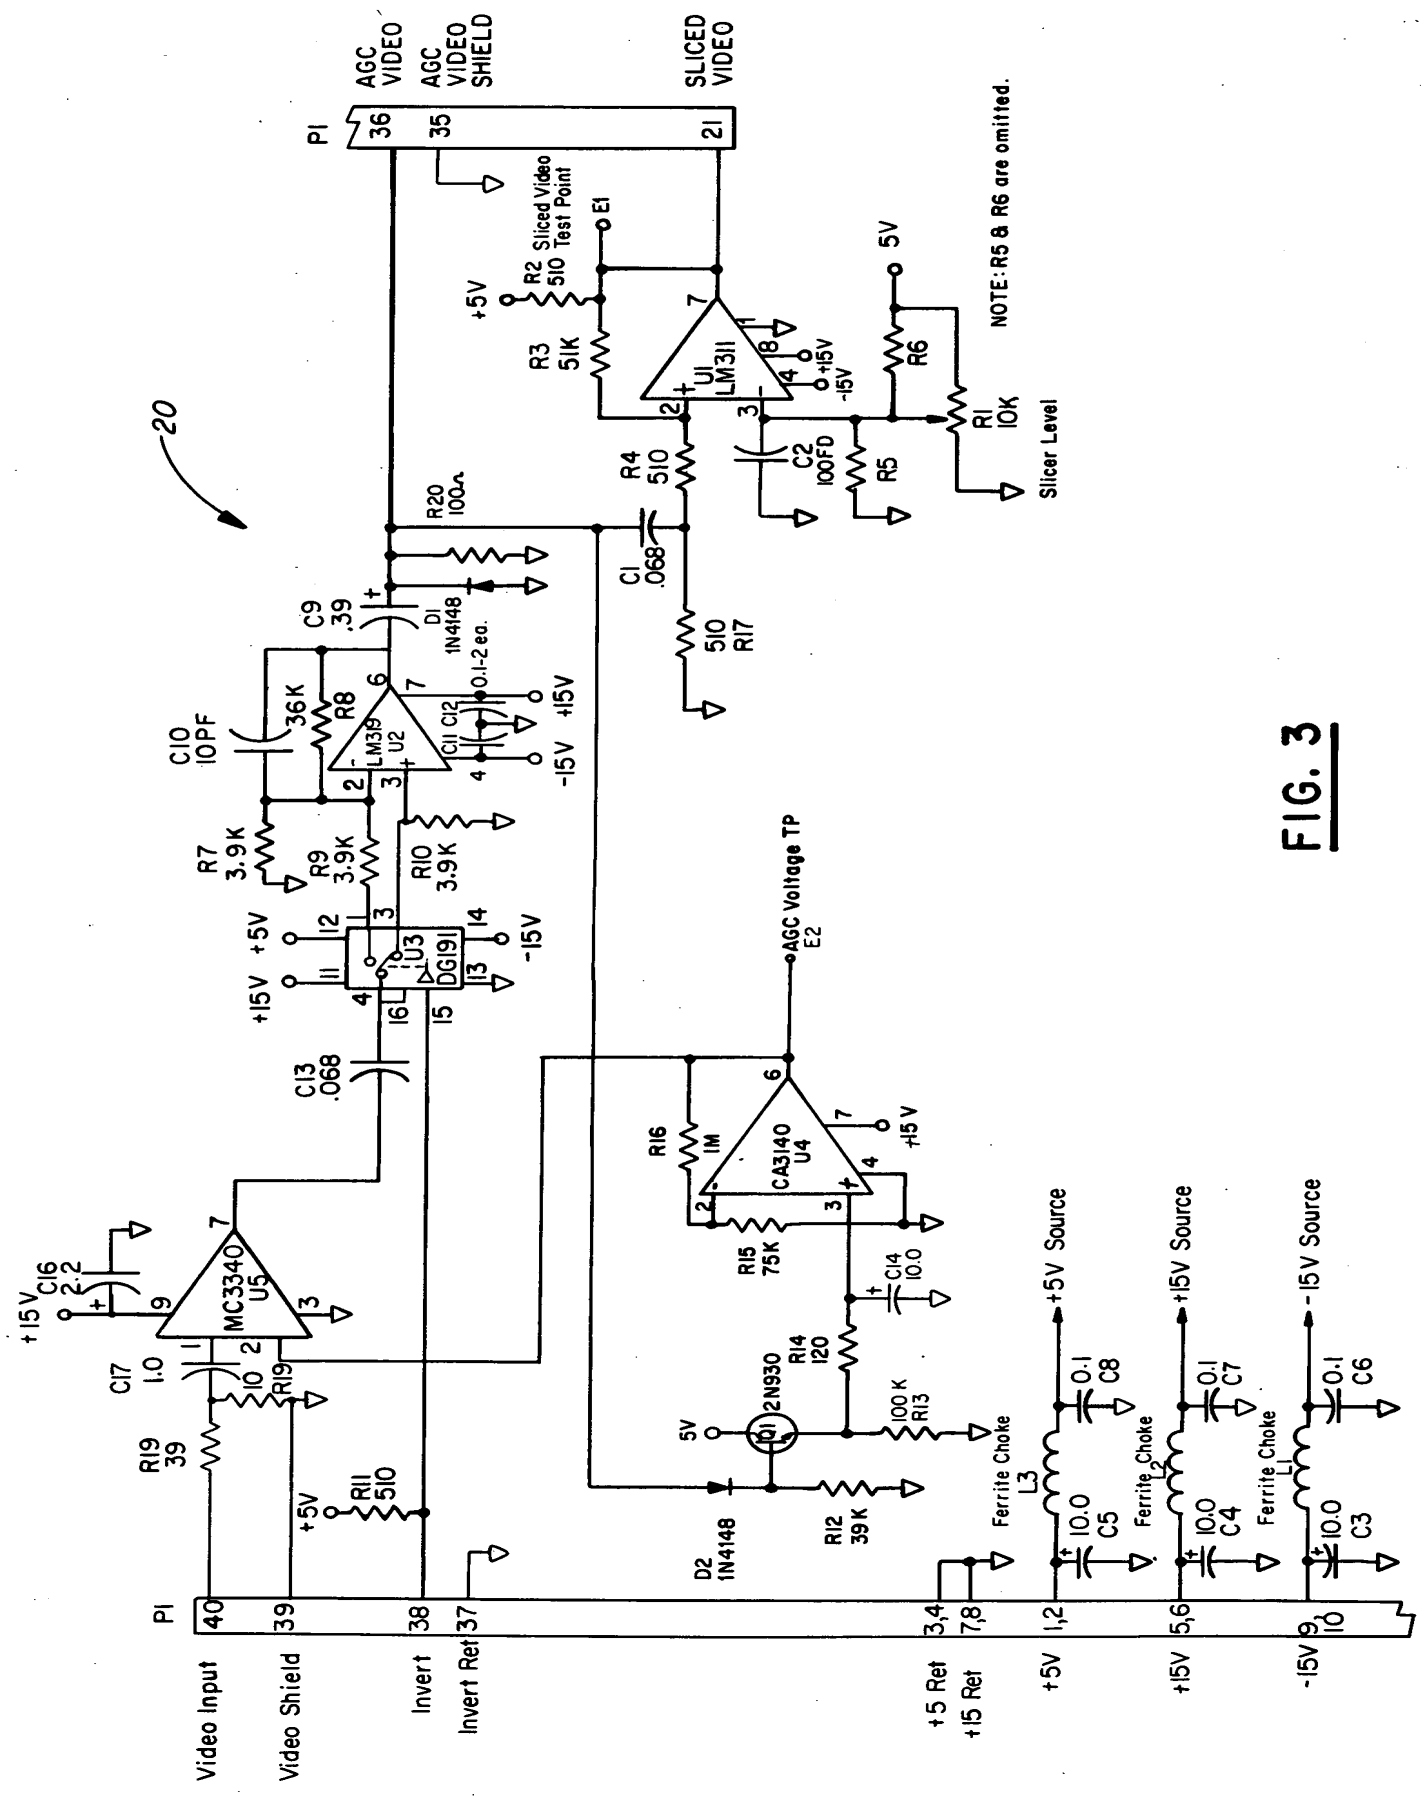

APPROVED
BY
CLASS

0.0.
CLASS

PRINT OF DRAWING AS
ORIGINAL FILED.

Mont Frisbee, Jr.
16, NC 65851
G. Keough

610204

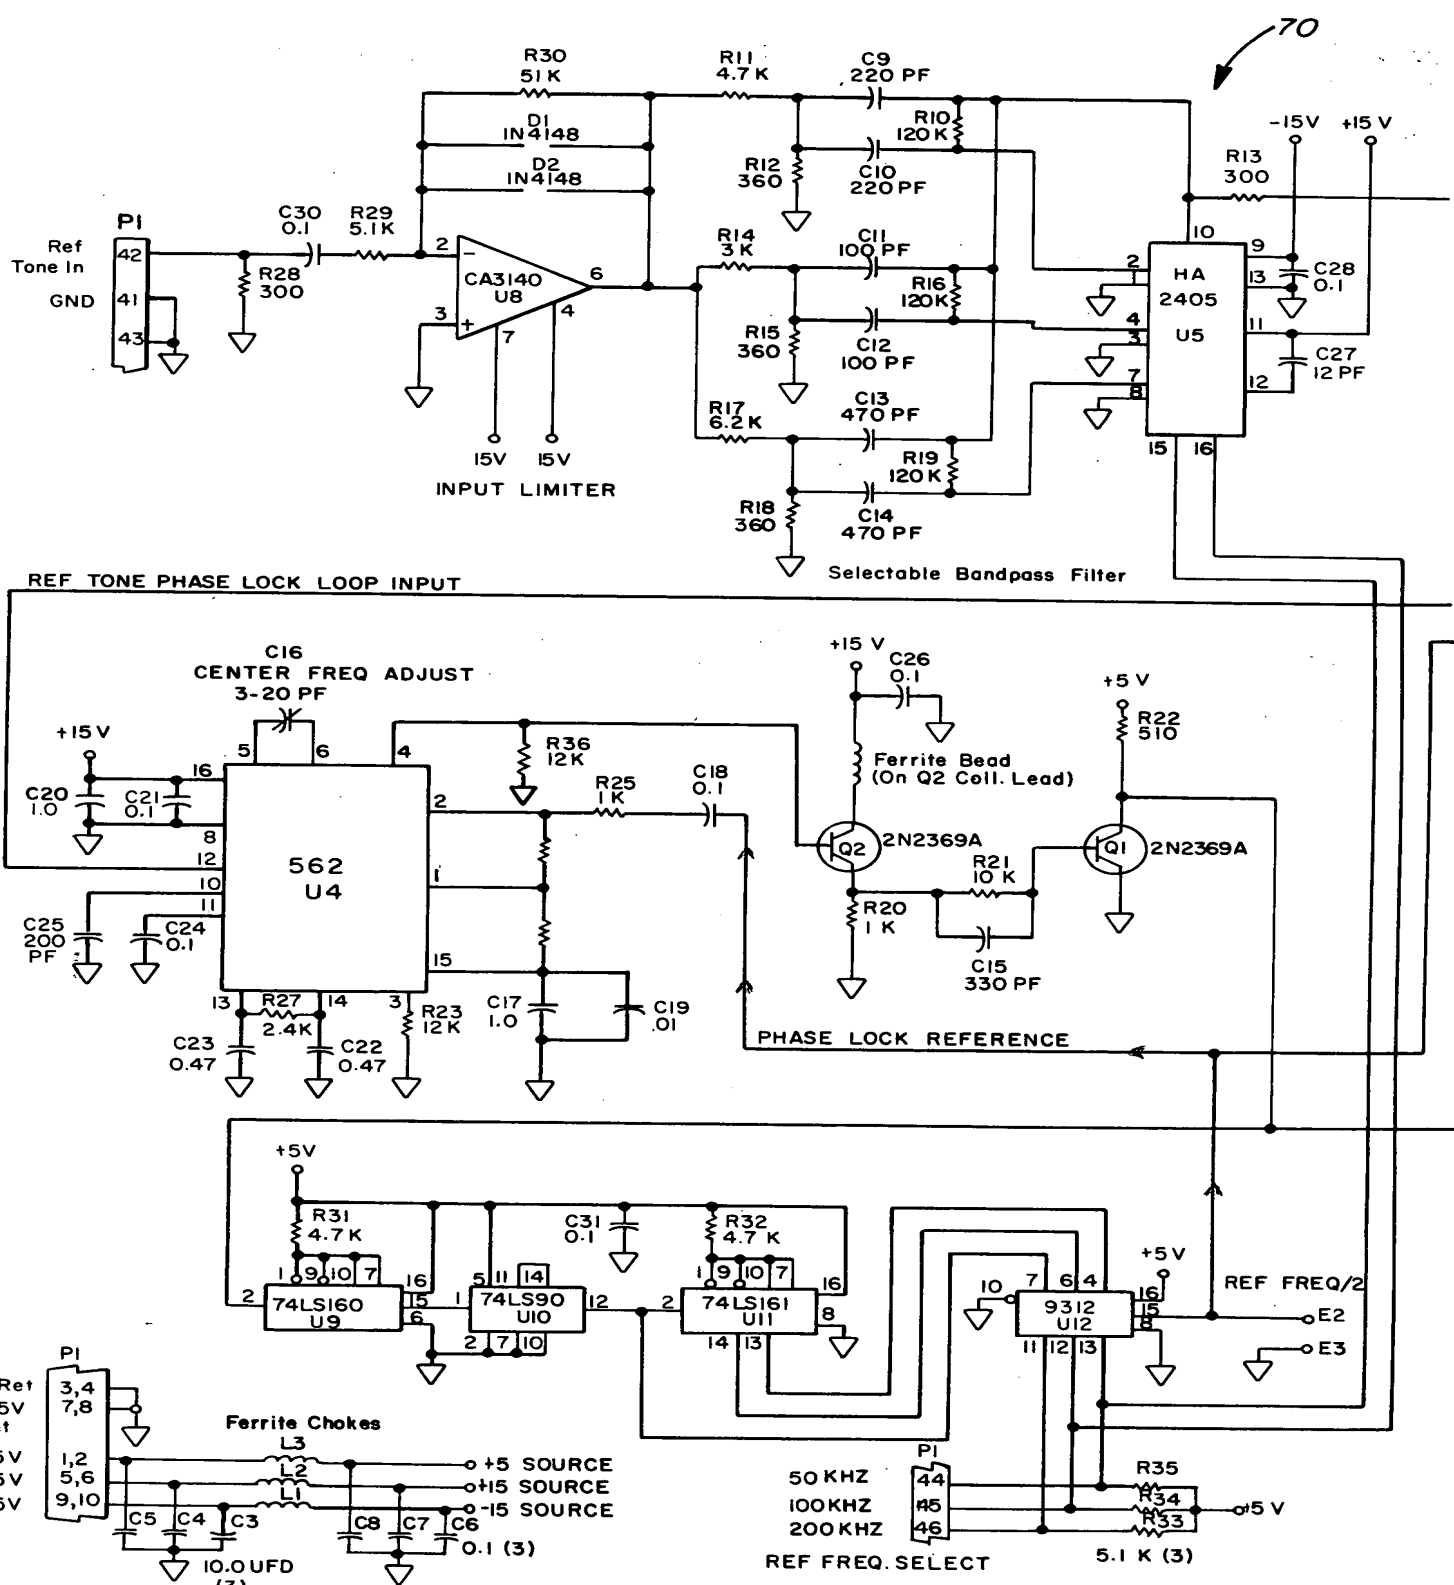


FIG. 4a



FIG. 4b

6102C4

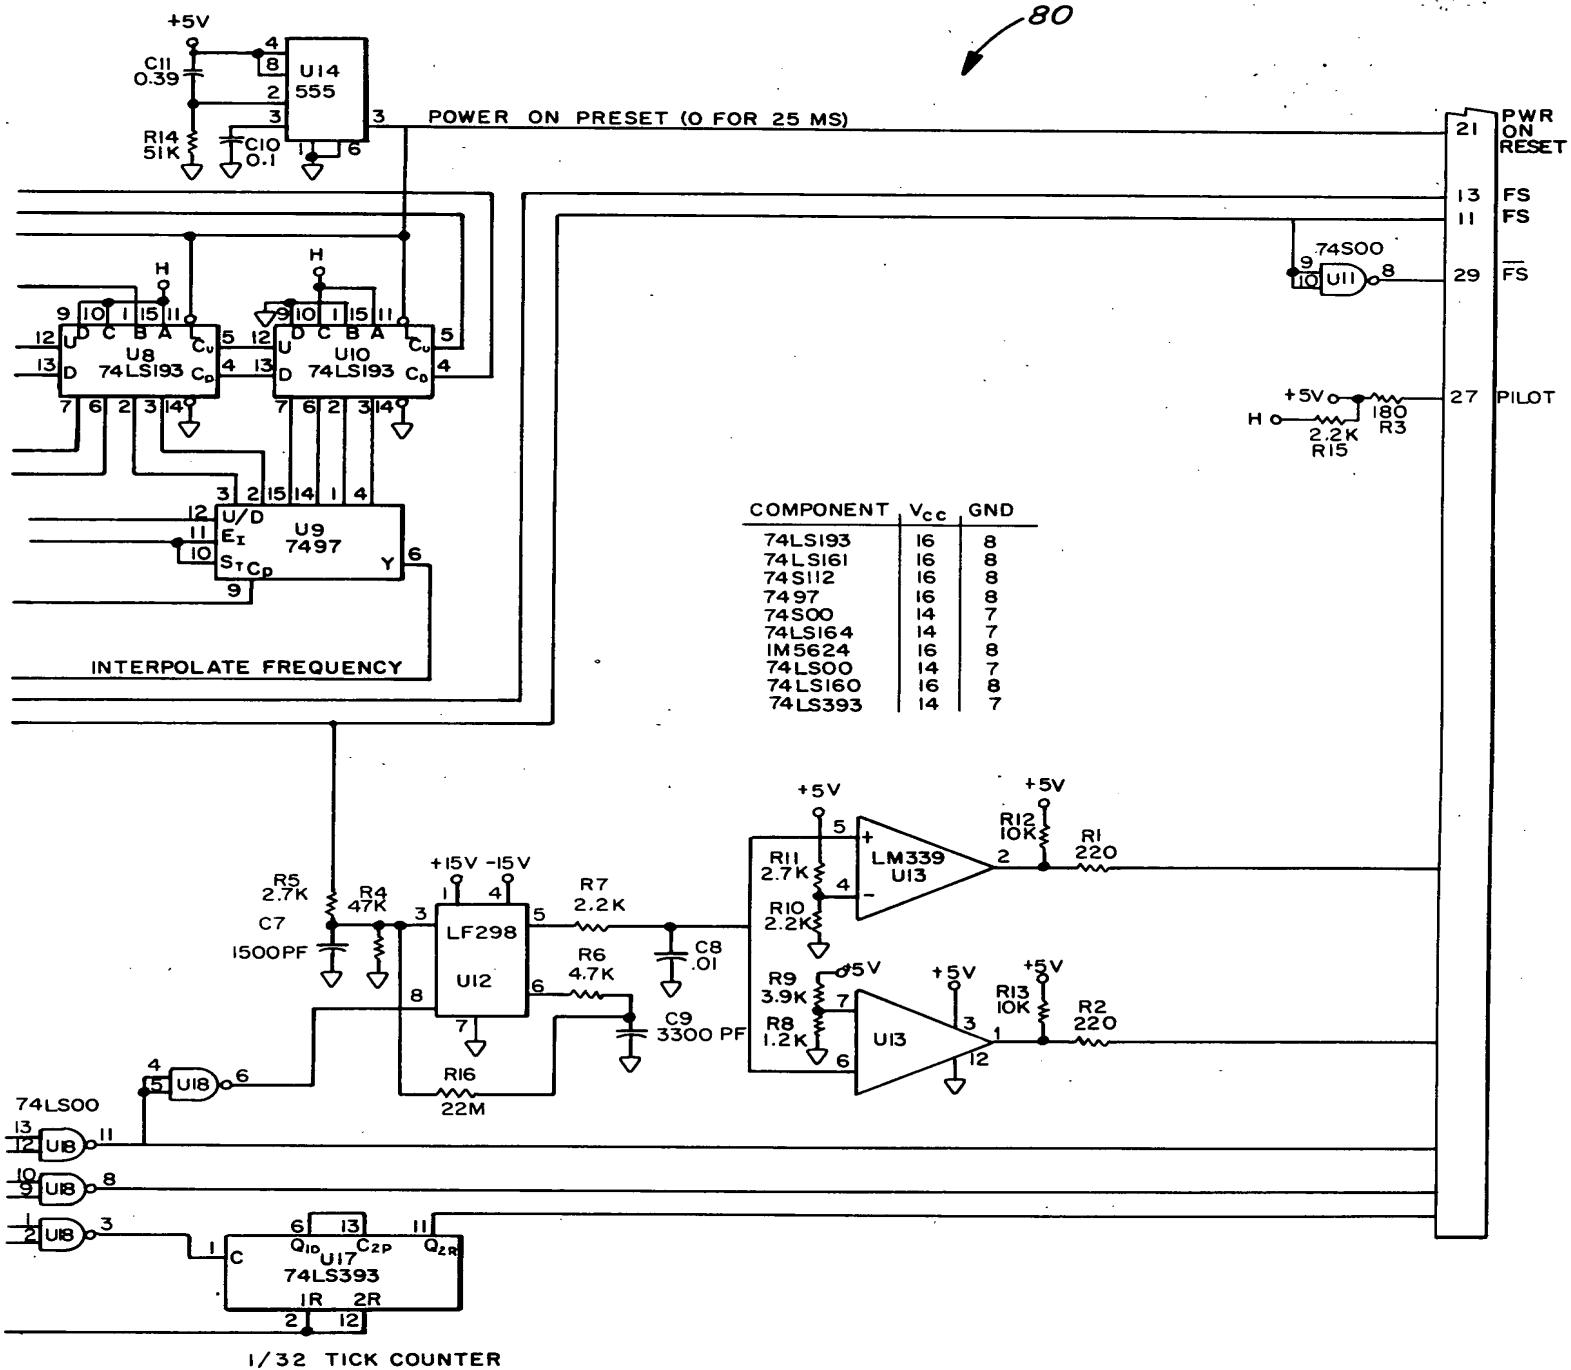


FIG. 5b

610204


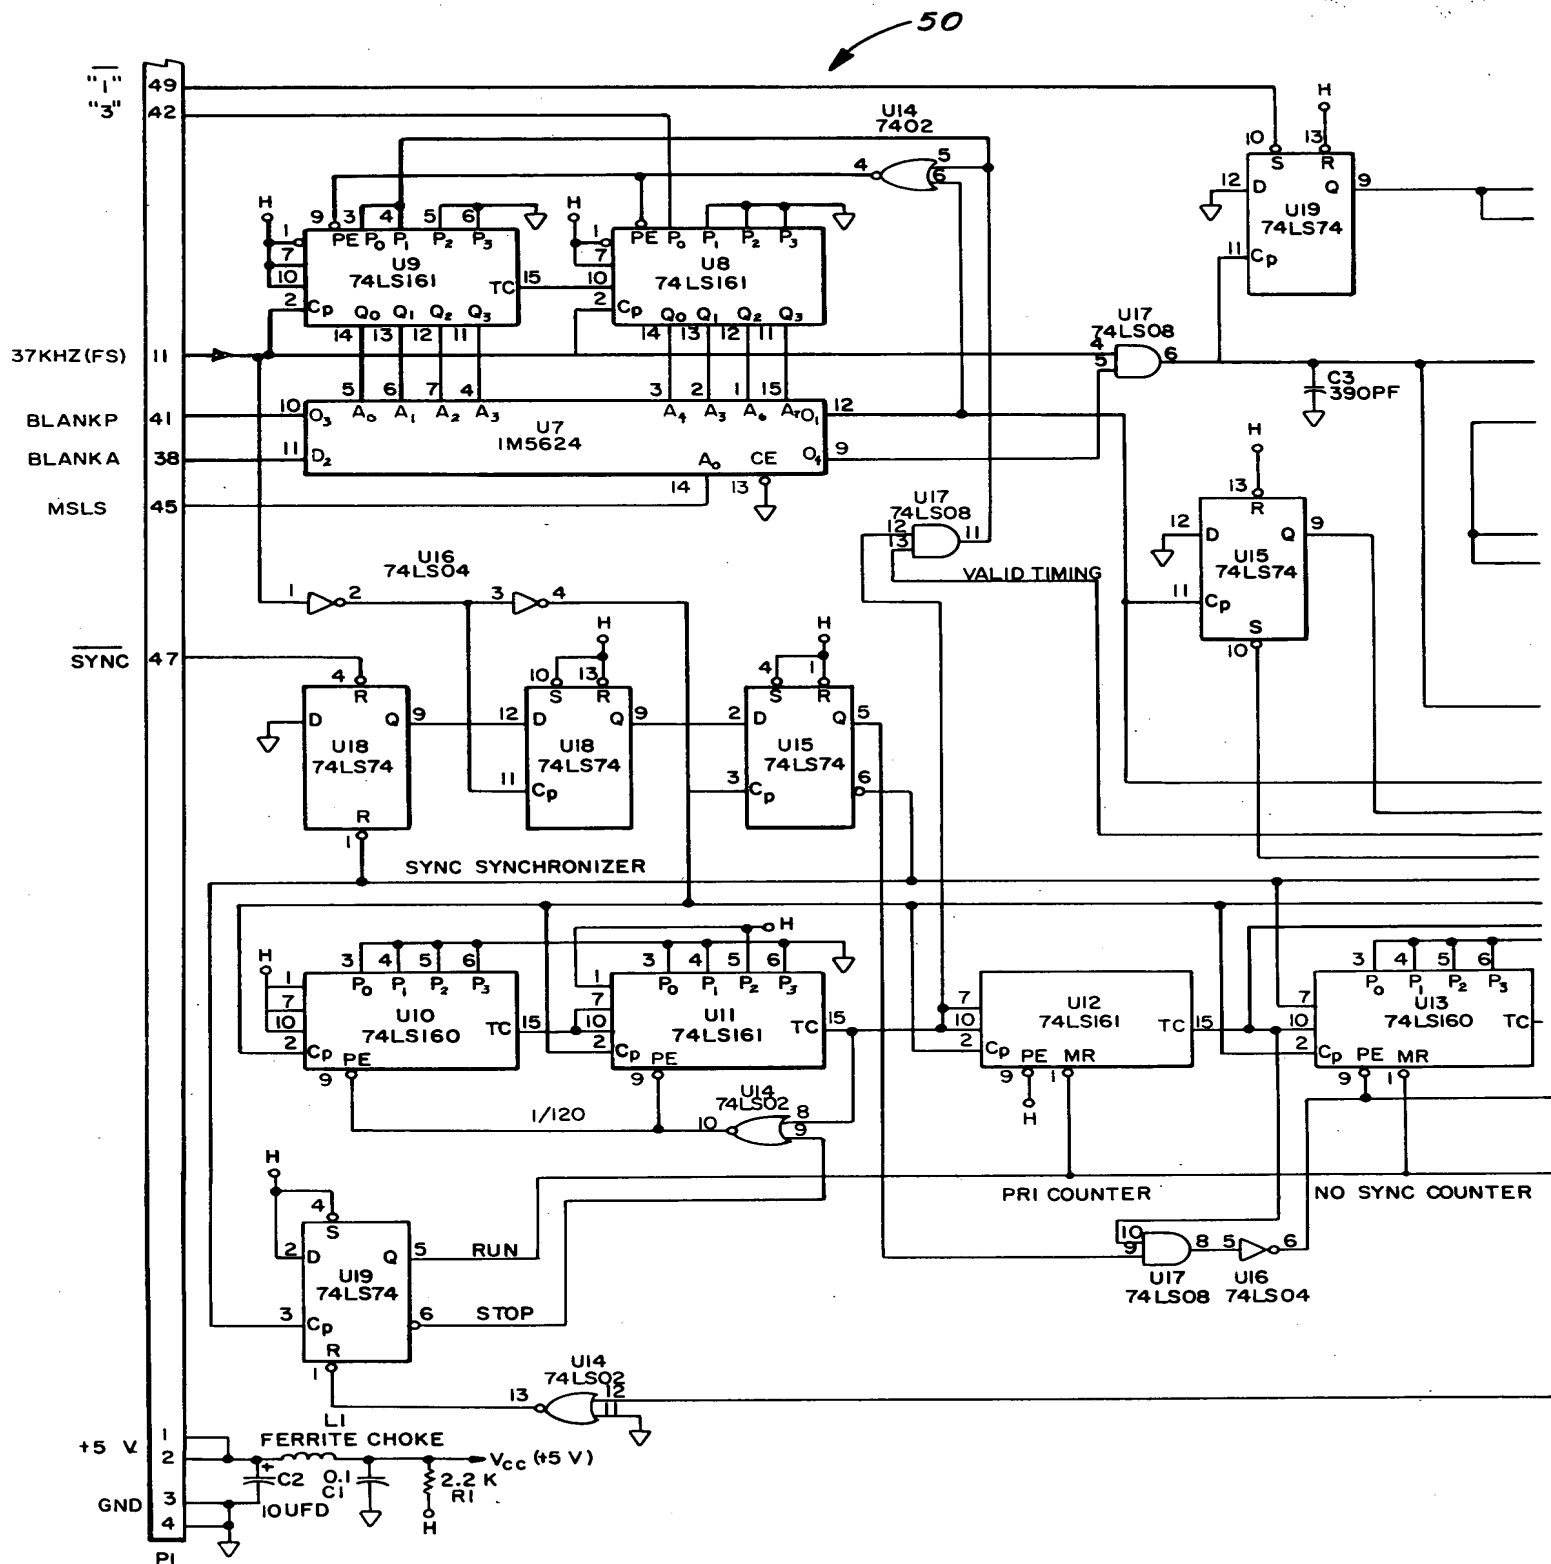


FIG. 6a



610204

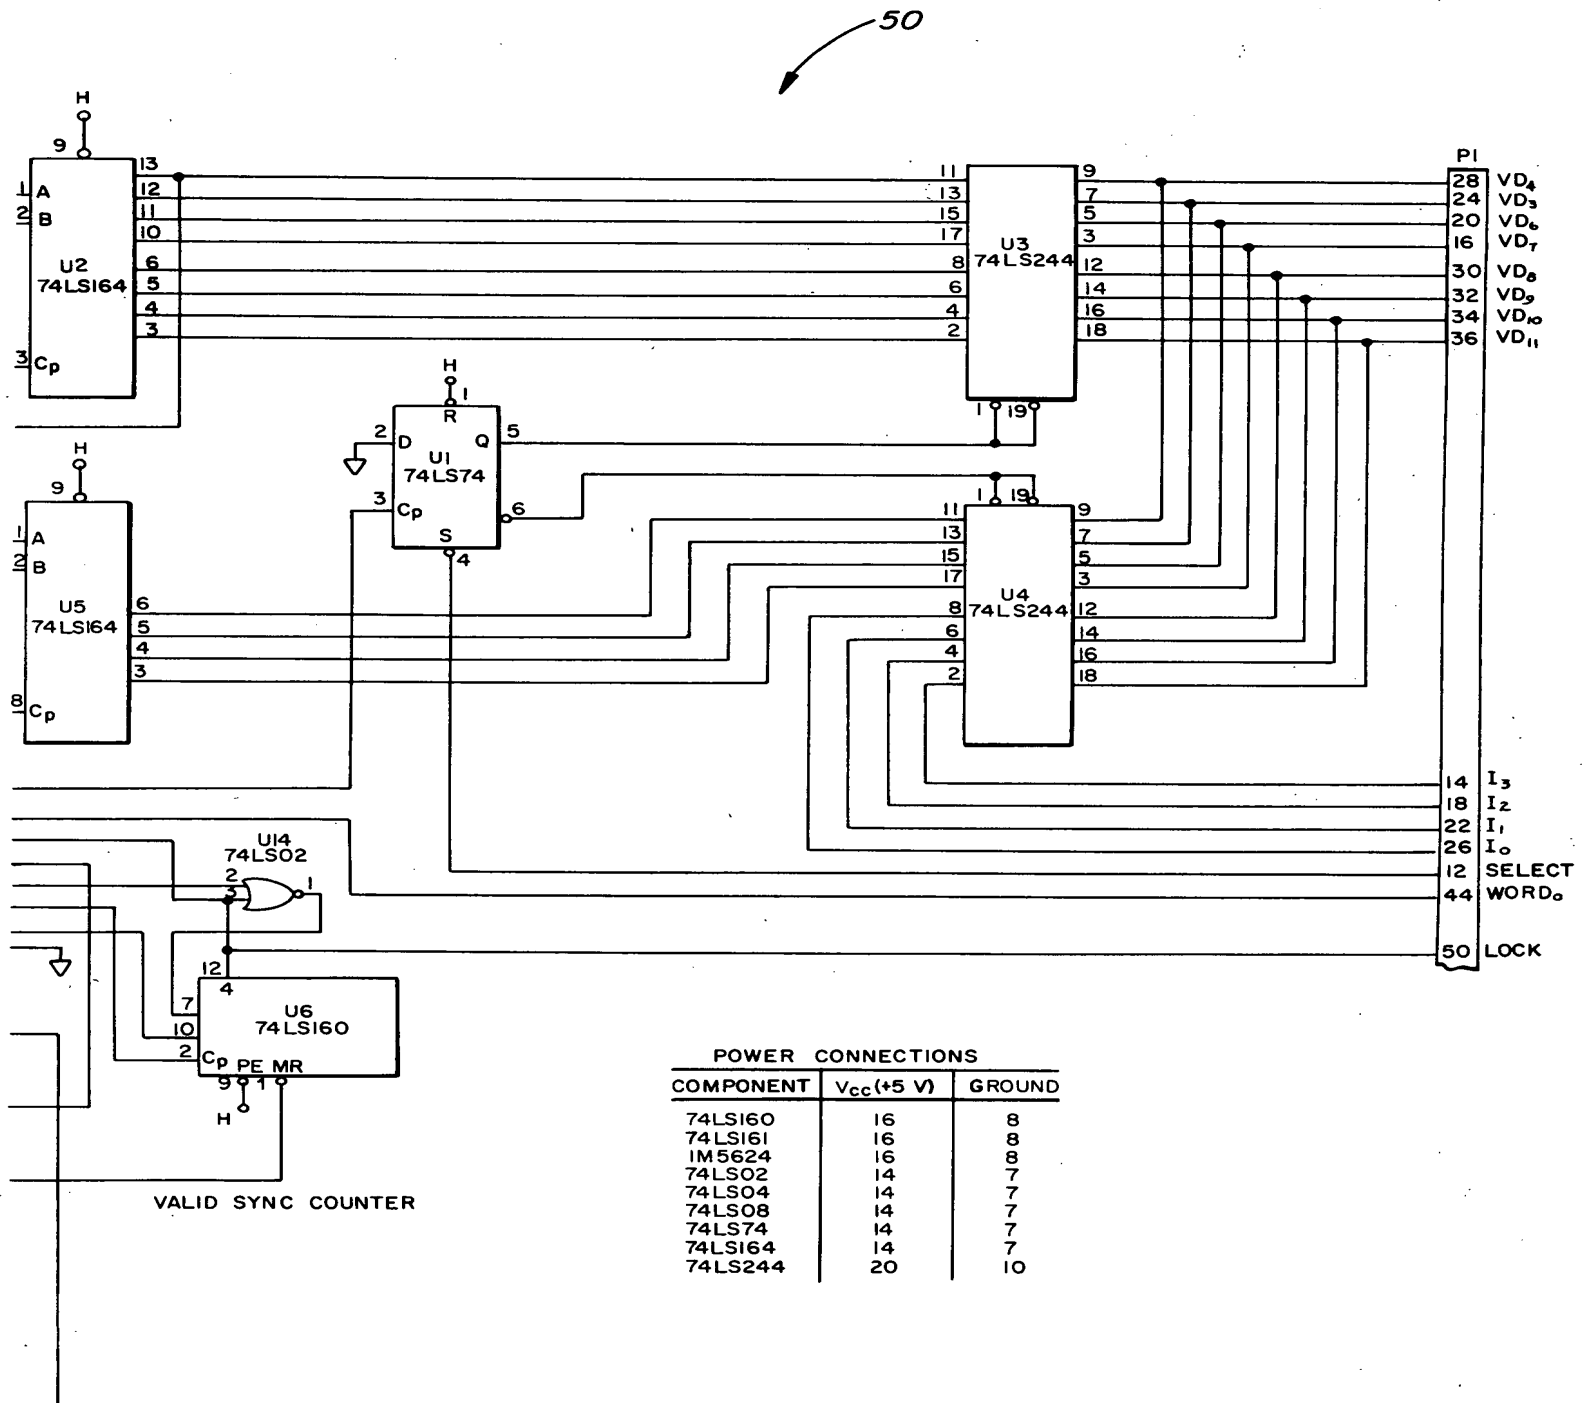


FIG. 6b

6102C4

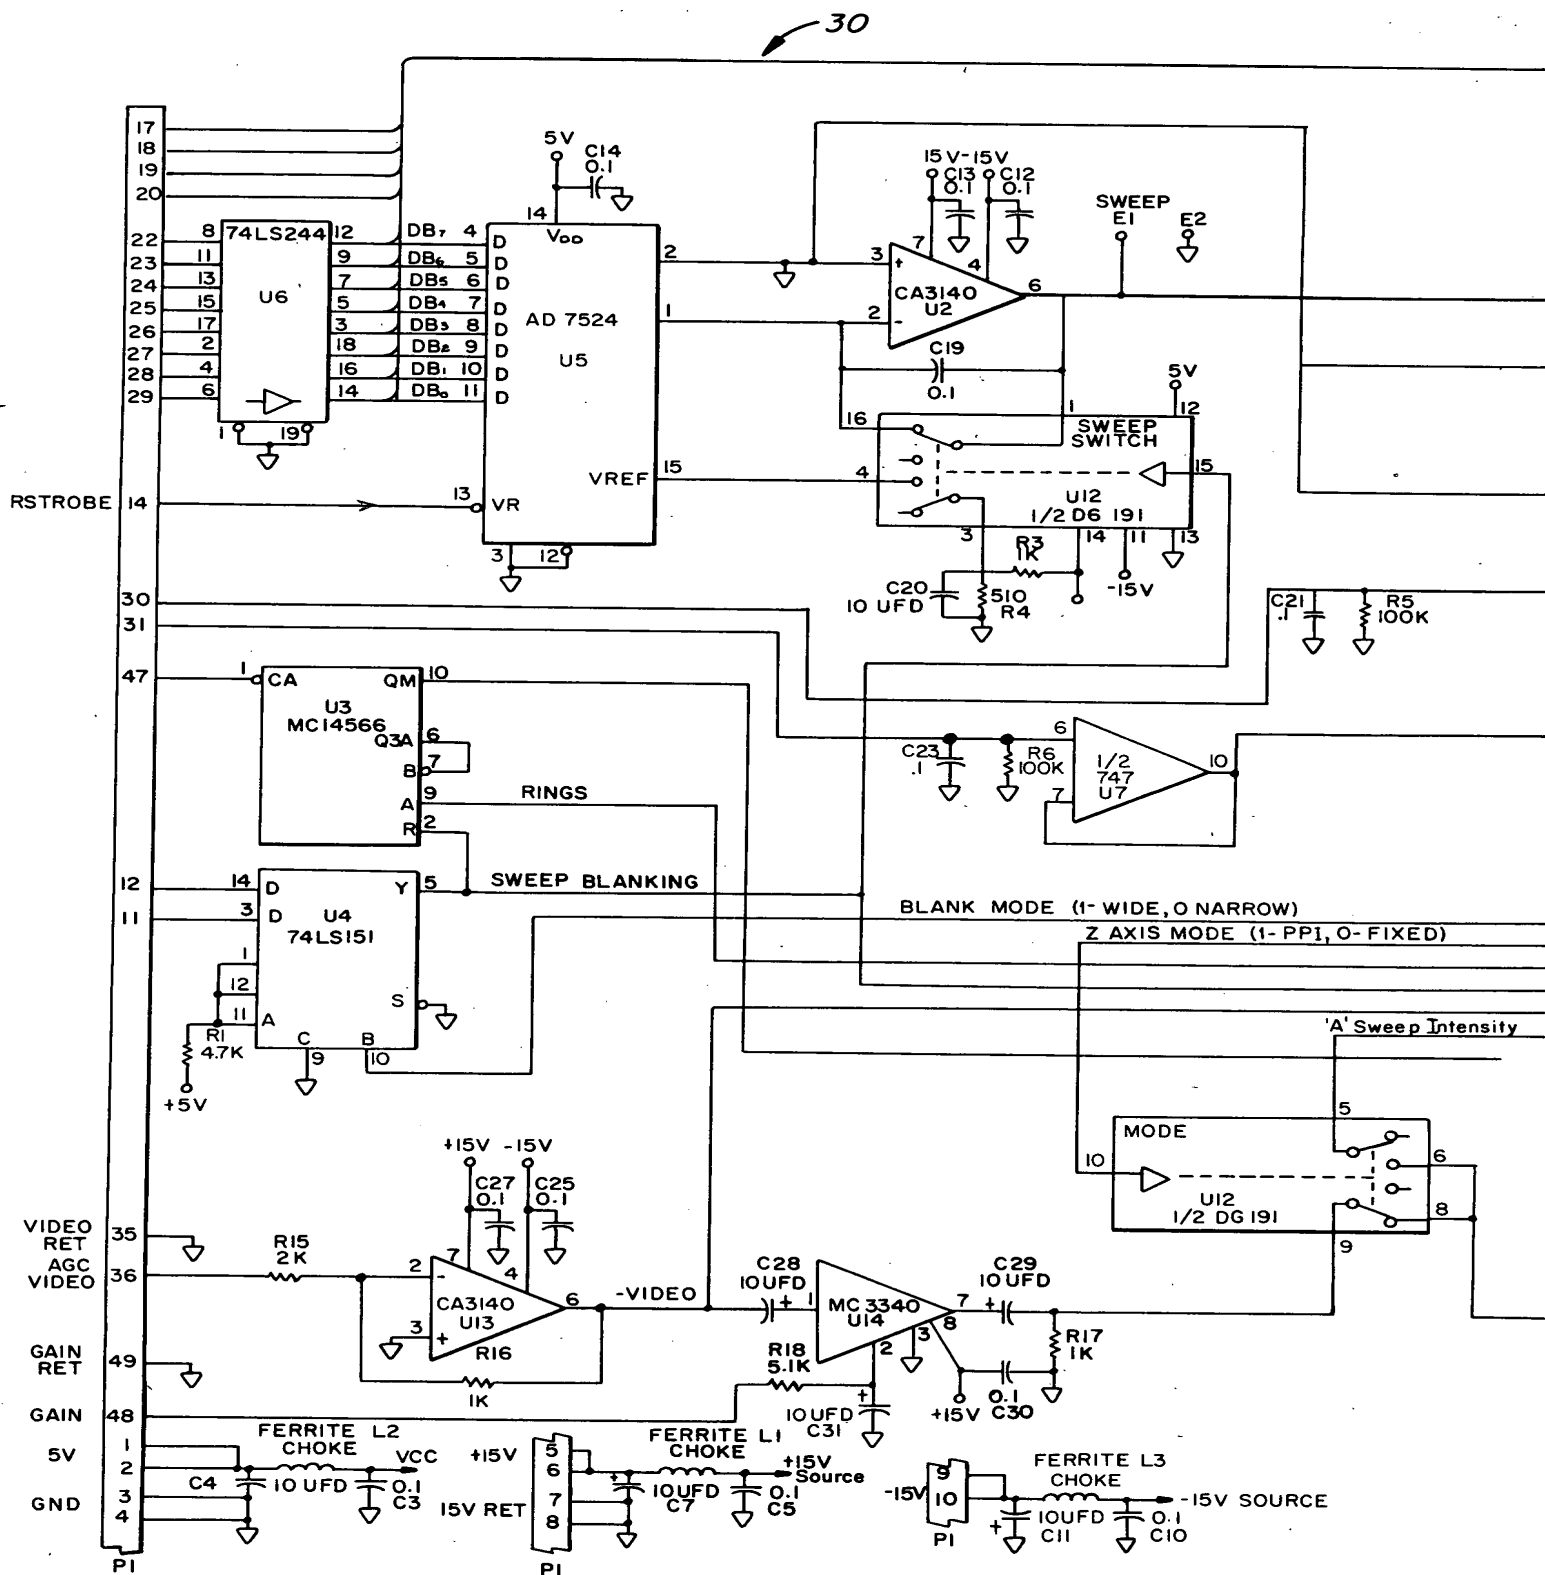


FIG. 7a

610204

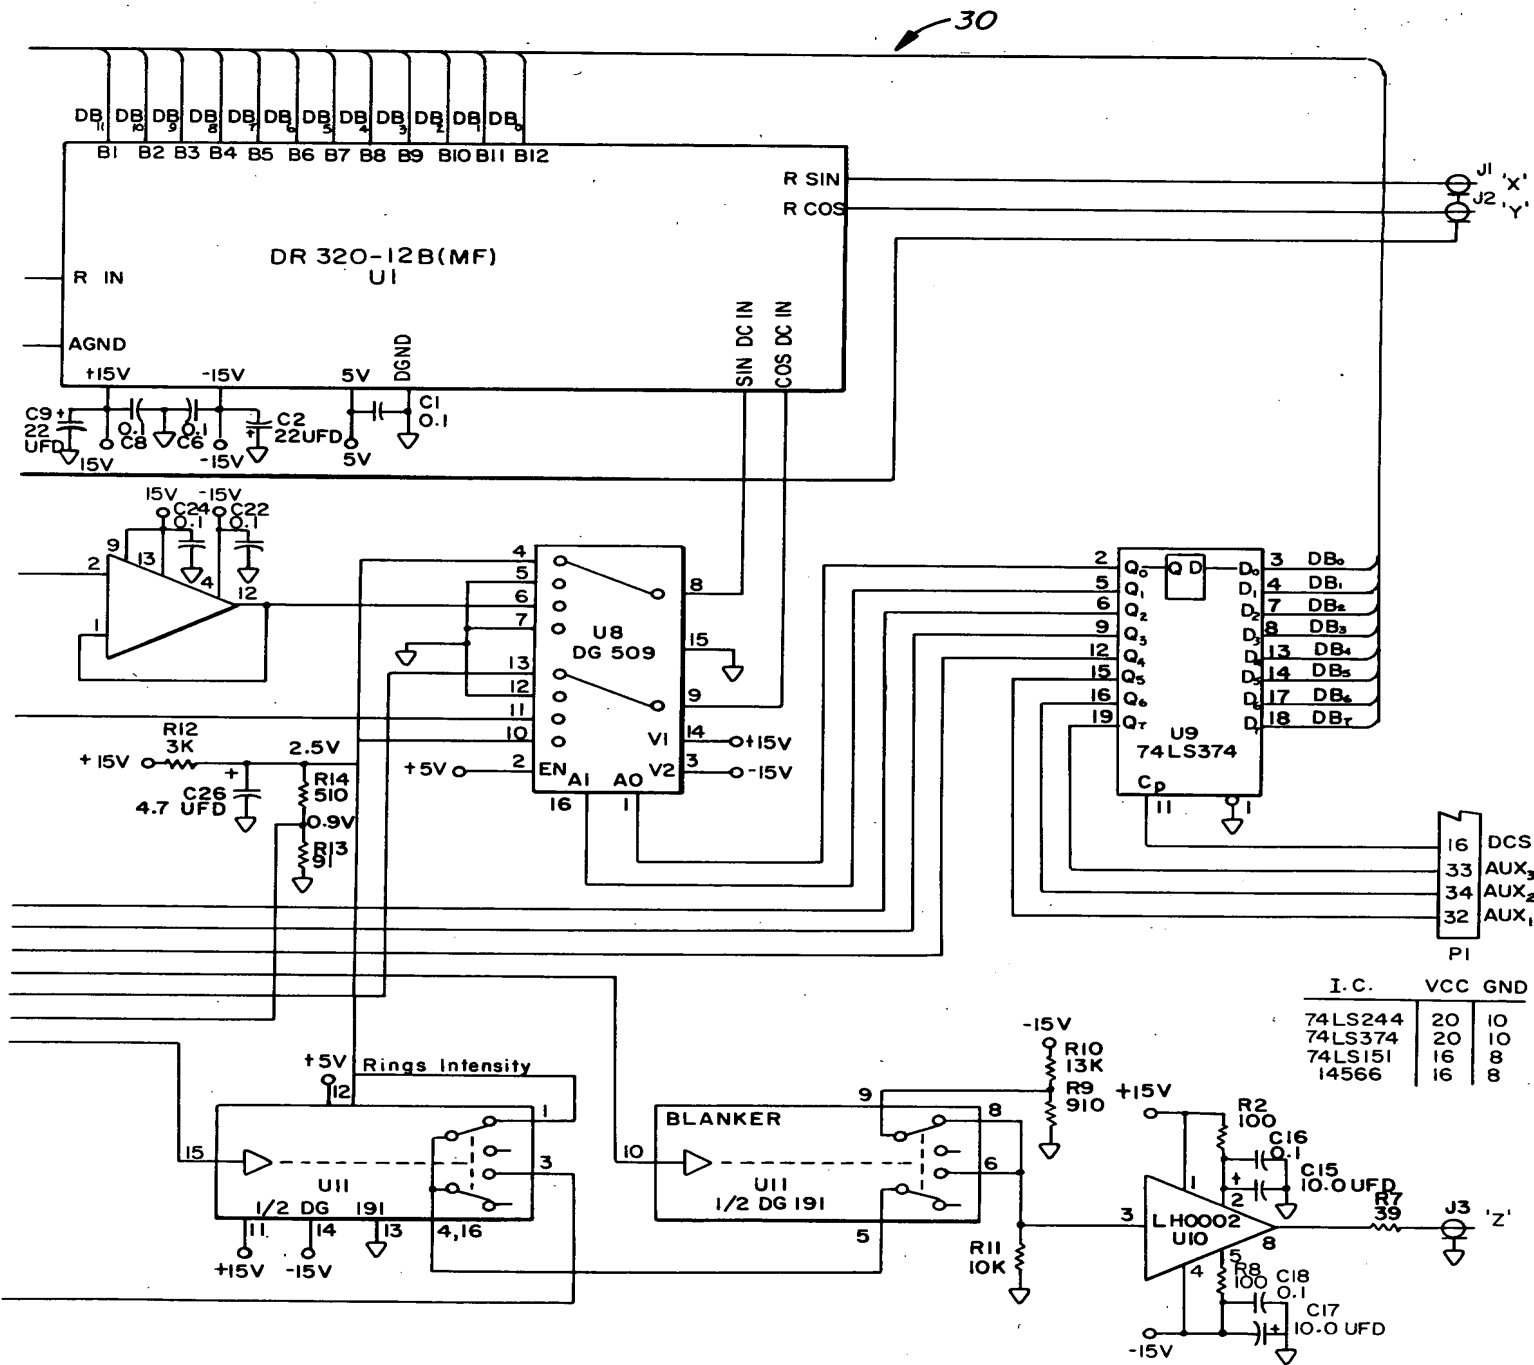


FIG. 7b

40



40

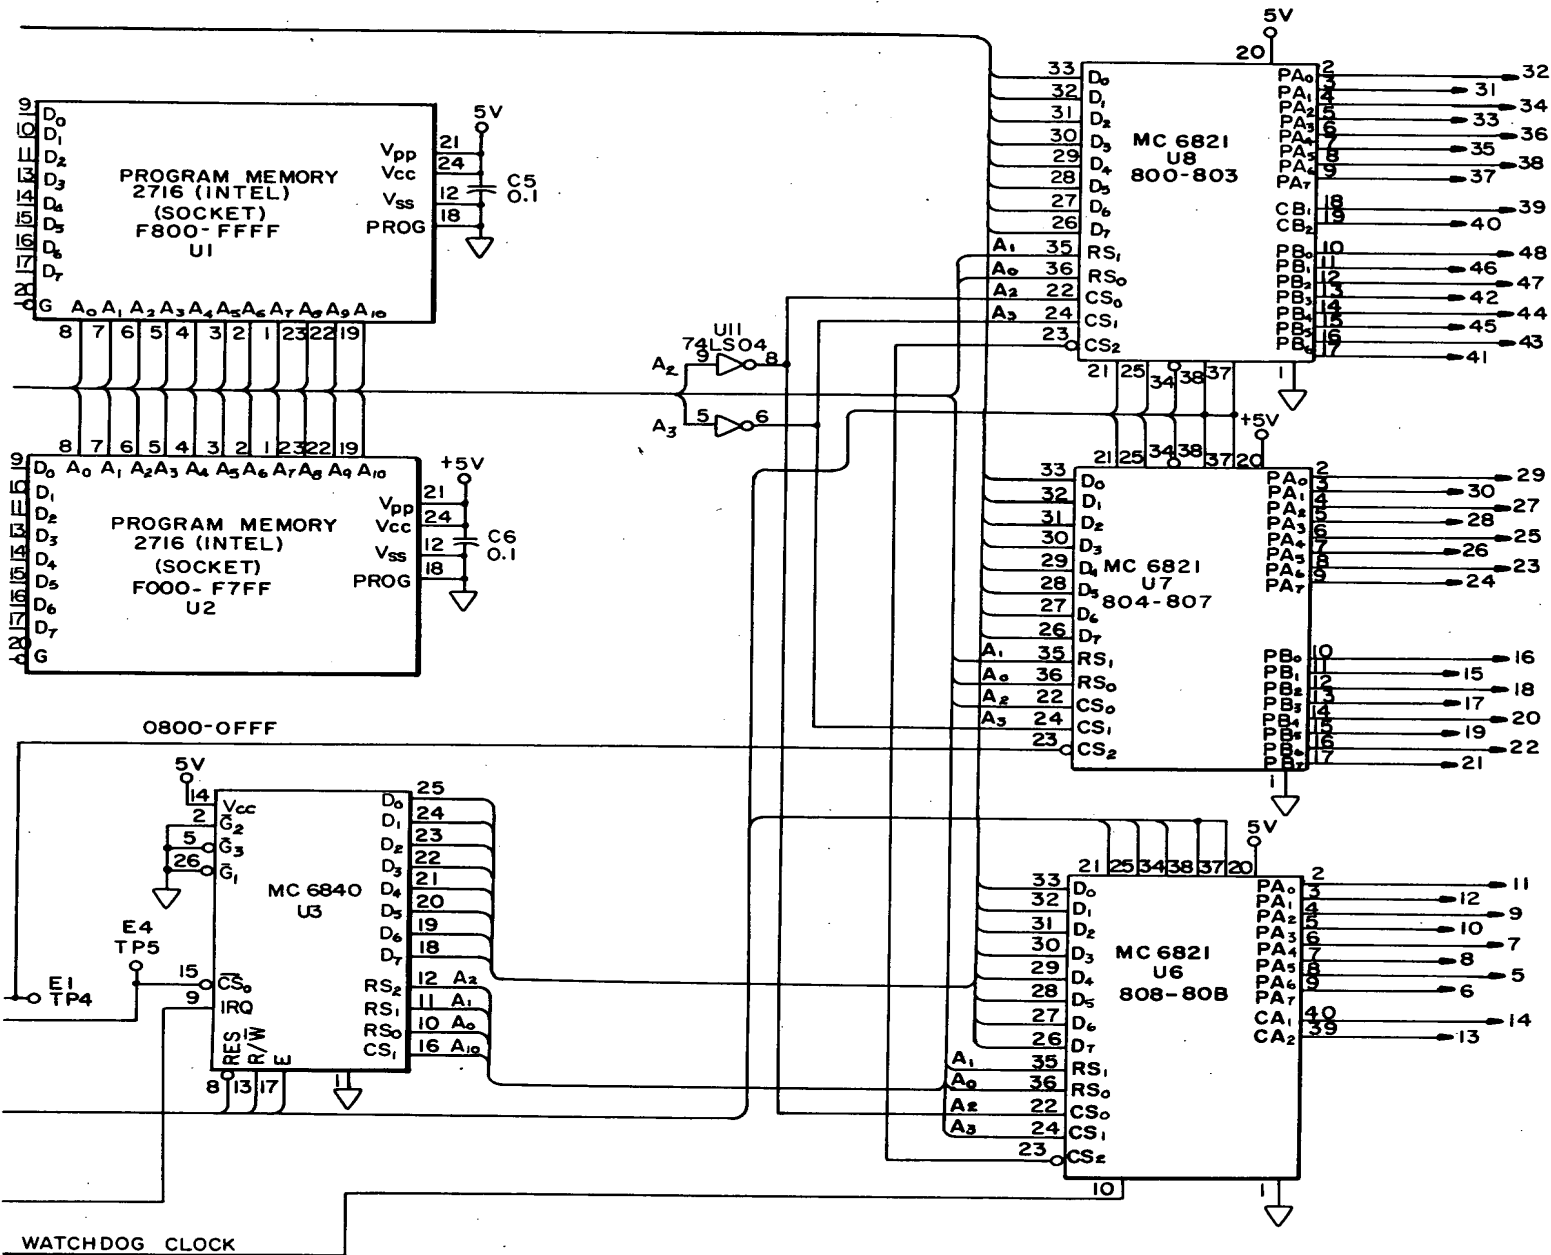


FIG. 8b

610204


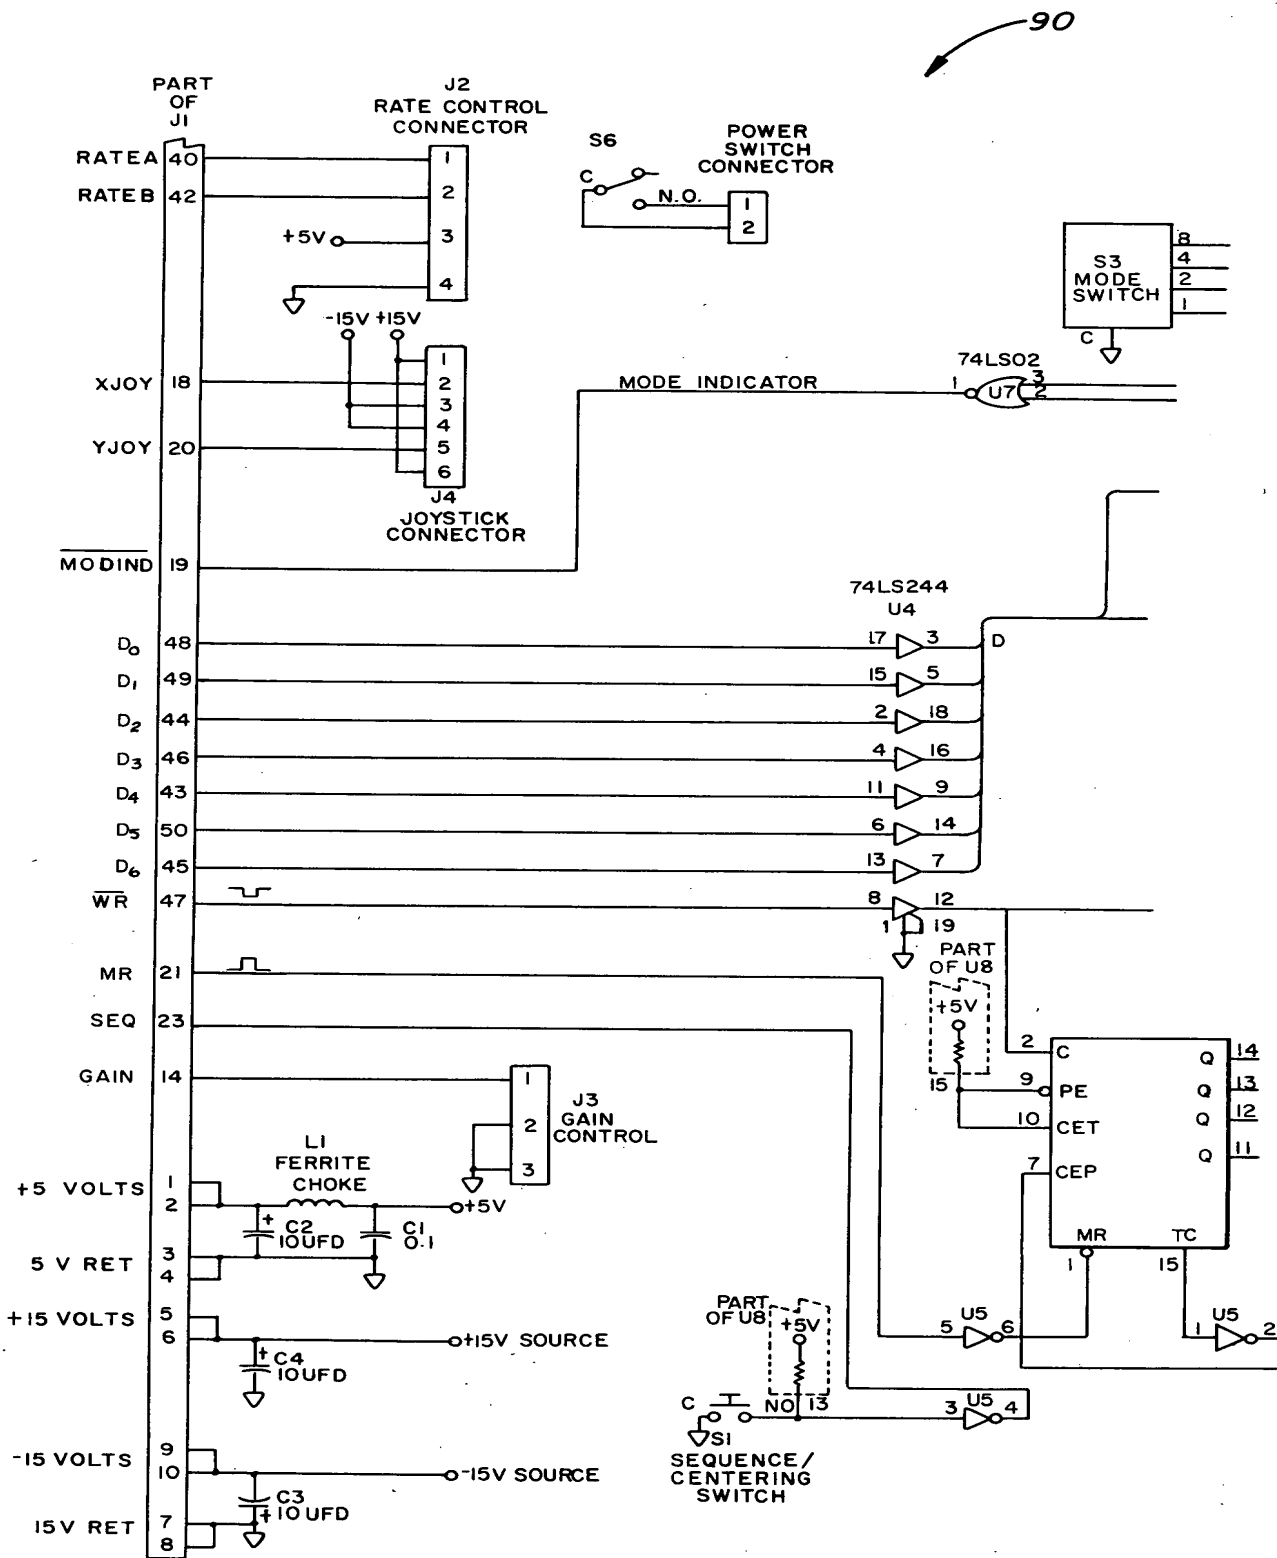


FIG. 9a

610204


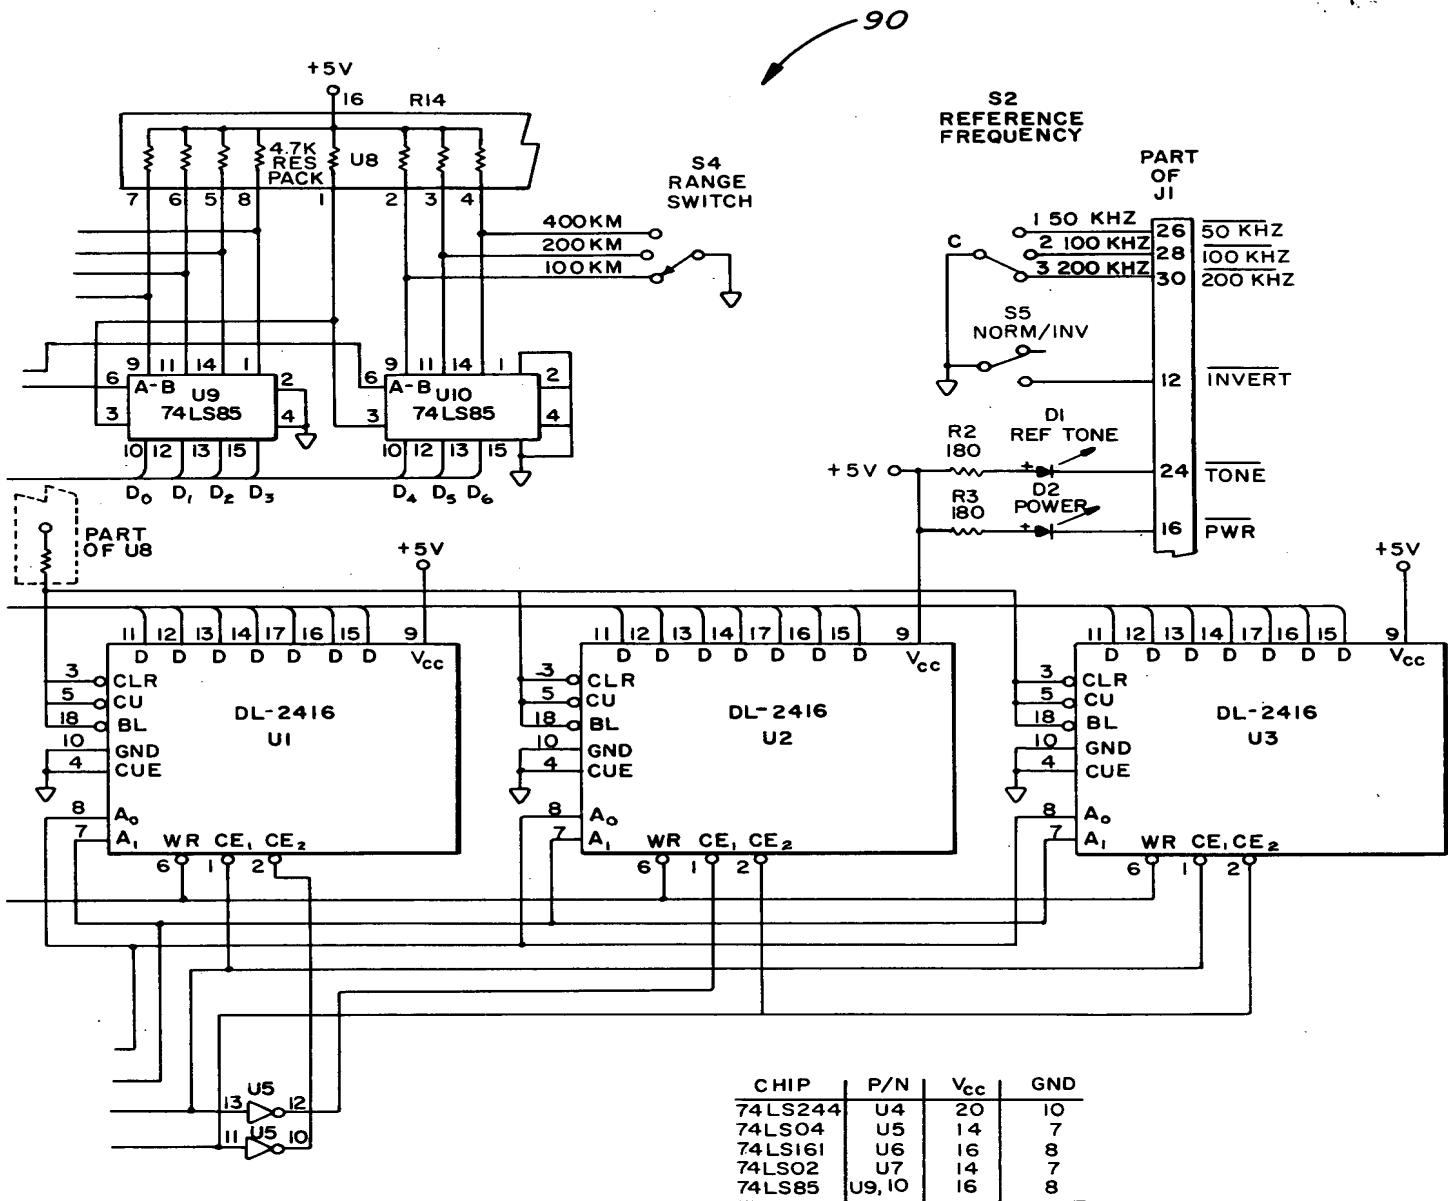


FIG. 9b

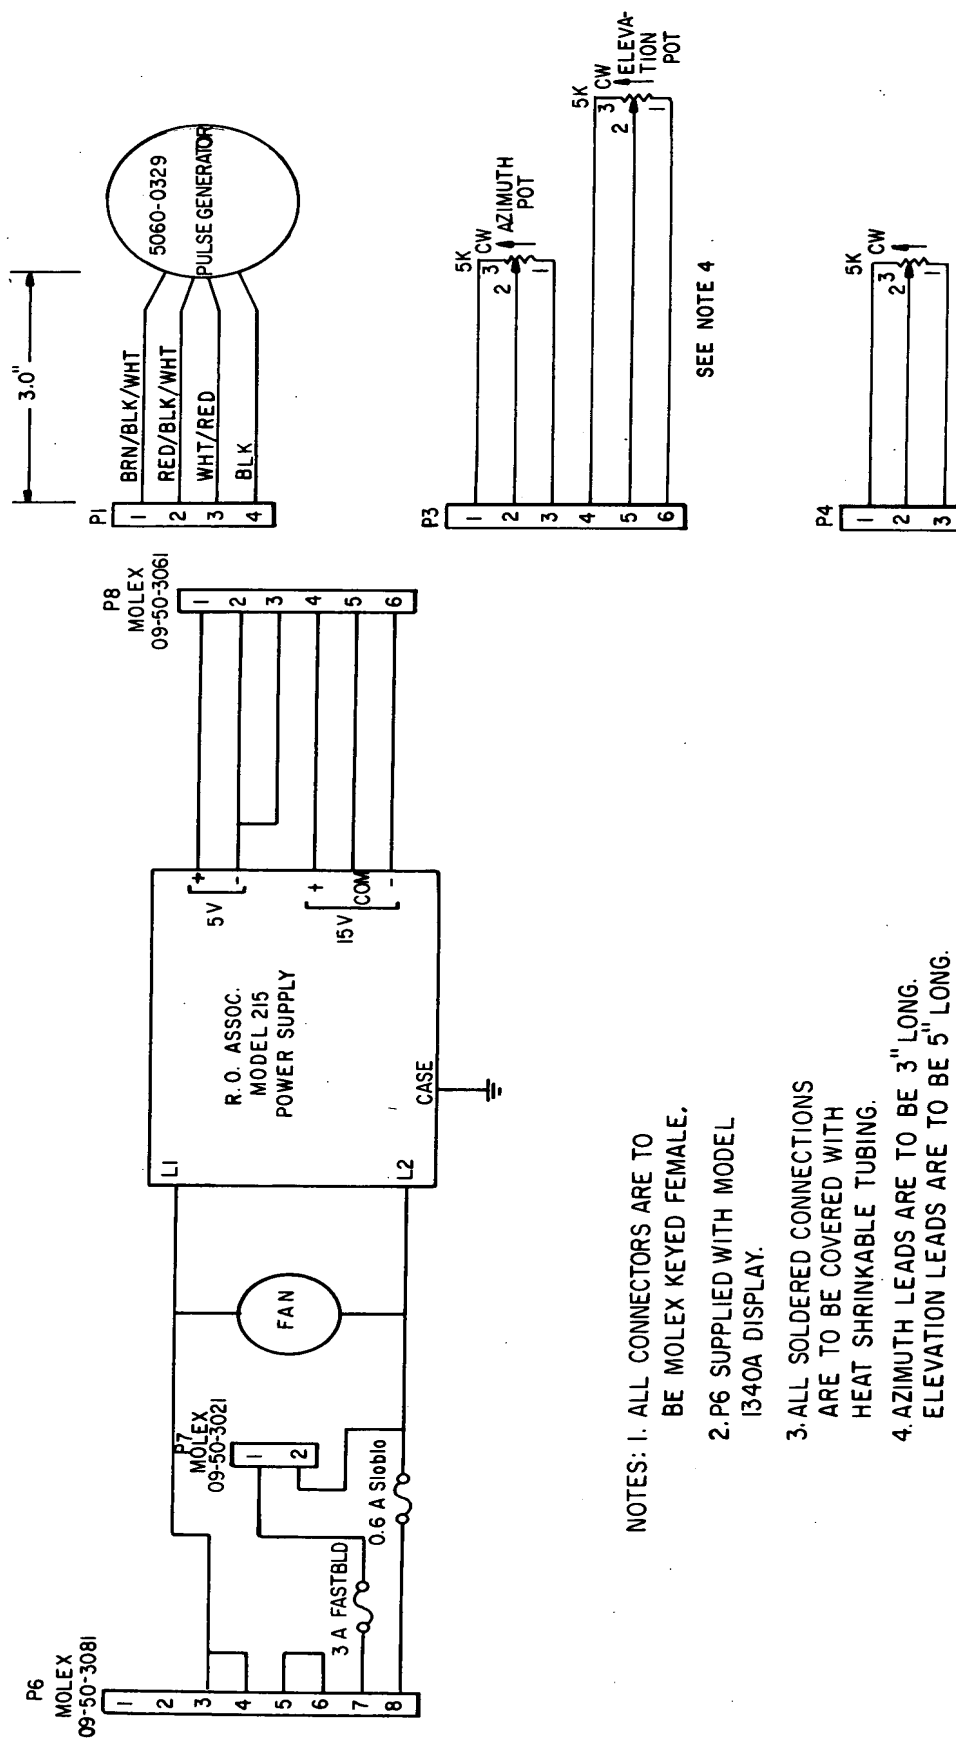

NOTES: 1. ALL CONNECTORS ARE TO BE MOLEX KEYED FEMALE.

**2.P6 SUPPLIED WITH MODEL
I340A DISPLAY.**

3. ALL SOLDERED CONNECTIONS ARE TO BE COVERED WITH HEAT SHRINKABLE TUBING.

4. AZIMUTH LEADS ARE TO BE 3" LONG.
ELEVATION LEADS ARE TO BE 5" LONG.

FIG. 10